

4047 - Champ Pick Up Bed Dolly

CHAMP

Frame Straightening Equipment Inc.



Made In USA






WARNING Read all assembly instructions completely before attempting to assemble unit. Improper assembly could result in damage to the pick up bed or injury to user.

Auto Body Toolmart
Champ Frame Straightening Equipment, Inc.
2545 Millennium Dr. Elgin, IL 60124 (800) 382-1200
www.autobodytoolmart.com


Parts List

- A.** (2) Base
- B.** (2) Adjustable Brackets
- C.** (4) Casters (2 Locking)
- D.** (4) Locking Pins
- E.** (4) Large End Caps
- F.** (4) Small End Caps
- G.** (16 Each) Bolts, Nuts, Washers and Lock Washers

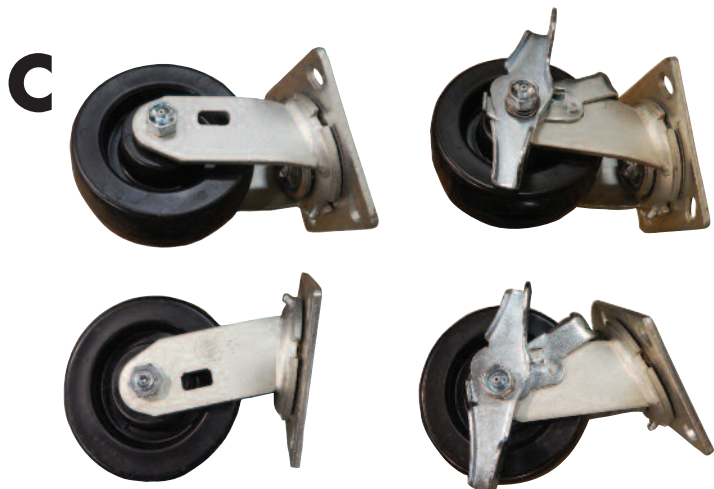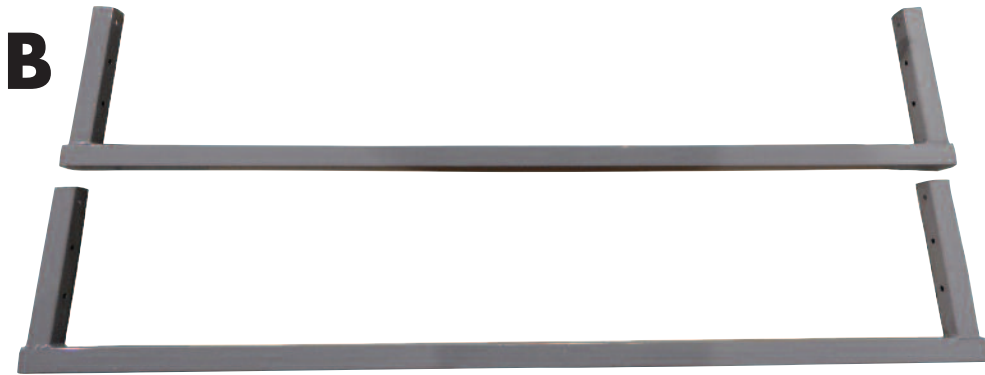

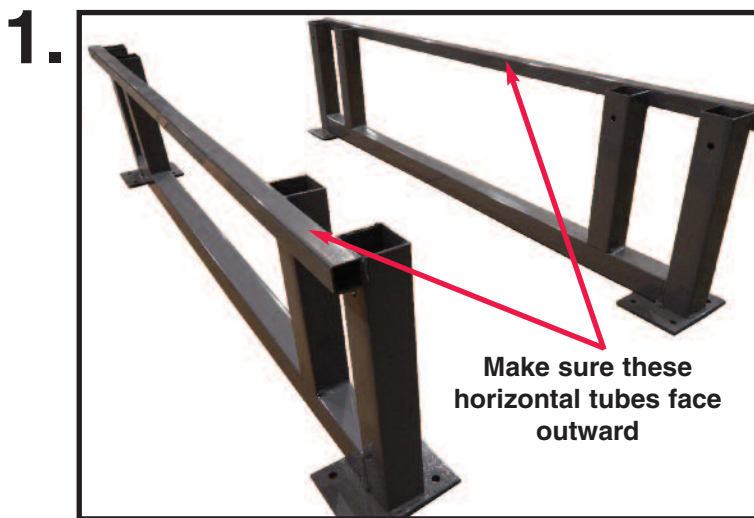

Layout the two bases (A) like the above picture. Make sure that the upper horizontal tubing is facing out.

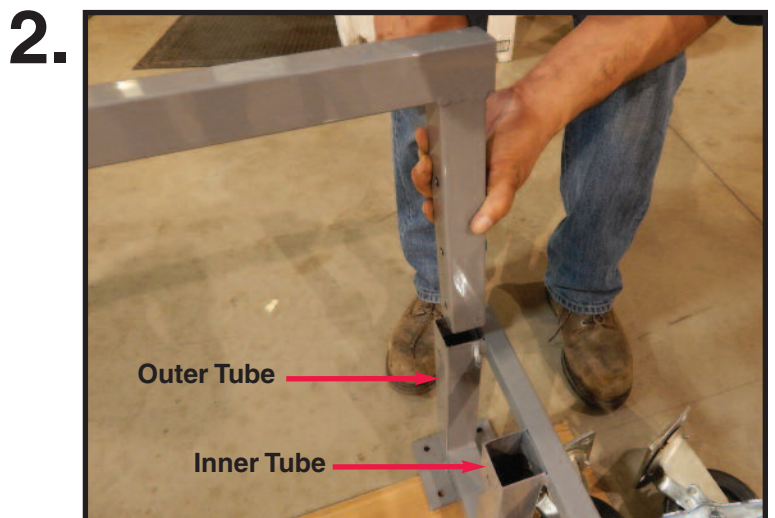

Insert the vertical arm of the adjustable bracket (B) in to either the outer or inner tube of (A), depending on the width of the truck bed. Do this to all sides.



Once the adjustable brackets (B) are at the desired height, insert the locking pin (D). Do this to all 4 sides.



When attaching the casters (C) to the bottom of the 2 bases (A), slide the washer onto the bolt and insert the bolt through the plate on the base (A) and the plate on the castor (C). Secure the bolt with the lock washer and nut. (See inset picture)



Insert the end caps (E and F). The large end caps are for the adjustable brackets (B) and the small end caps are for the upper horizontal tubing on the 2 bases (A).



Completed Champ Pick Up Bed Dolly pictured above.