

Every Workshop Needs  
**RAPIDAIR**  
 Compressed Air Piping System

20100

**1/2" Nylon Tubing**

Sold in 100 ft. roll.

**Working Pressure 150 PSI**

**Temperature Range: -40° to +180° F**

Our nylon tubing is lightweight, corrosion/abrasion resistant and extremely durable. Compressor oils have no effect on it's performance.



**90500 Master Kit**

Compressor Manifold Kit (1) • Air Outlet Kits (2)

100 ft. Nylon Tubing

AIR Chucks not included



90100  
**Outlet Kit**

AIR Chucks not included



90200  
**Manifold Kit**



50300  
**Elbow**



20100  
**100' Tubing Kit**



20200  
**Tubing Clips**



50400  
**NPT Elbow**




50100  
**NPT Straight**



50200  
**Tee**



50500  
**Union**

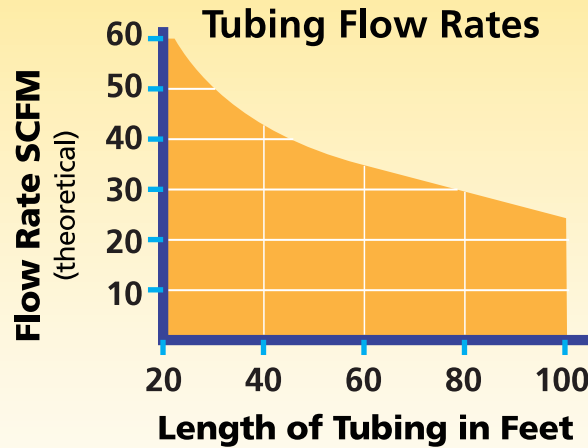

- Regulate air pressure to this piping system to a maximum of 150 PSI.
- Check local building codes before installation.

**WARNINGS:**

- Compressed air is dangerous if not used properly.
- Do not point compressed air source at any part of your body or at any person.
- Always use eye protection when using compressed air.



Engineered  
**Specialties** LLC  
 Arpin, Wisconsin

1-800-954-3310 • [www.rapidairproducts.com](http://www.rapidairproducts.com)

- Air Anywhere
- Easy to Install
- Economical

**RapidAir** is a complete compressed air distribution system that is designed to easily install beneath walls of new construction, or on wall surfaces of existing workshops.

### Air Anywhere

No more dragging the compressor behind you and untangling the air hose and electrical cords. Reduce shop clutter and have constant compressed air instantly, anywhere.

RapidAir Compressed Air System allows you to design and install your own pressurized air system, any way you want it.

### Economical

An alternative to black or copper pipe installations, the modular design makes it less expensive to install than the traditional methods. With the RapidAir system there is no interior pipe corrosion, which results in longer tool life.

### Easy to Install

The RapidAir system includes professional quality Rapid Fittings, air distribution manifolds, air outlets, and nylon tubing. The system is engineered to maintain 150 psi.



Install it yourself... you can easily disassemble and re-modify your system. There are no special tools required to make your workspace more efficient and professional looking.




Elbow



Tee



Manifold

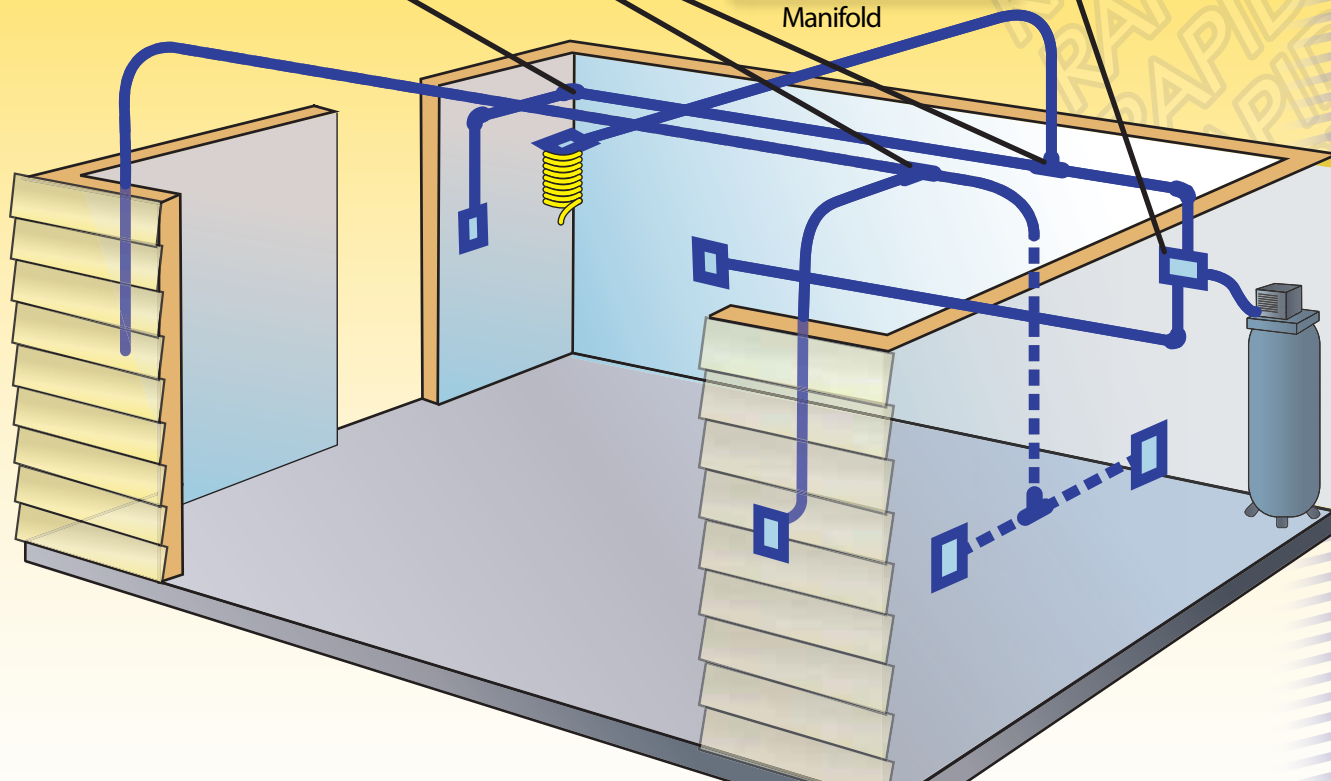

Surface Mount  
Air line is mounted to wall



Hidden Mount  
Air line is inside wall



Exterior Mount  
Air outlet is mounted outdoors



Ceiling Mount  
Air outlet is mounted on ceiling

## RapidAir Fittings

RapidAir fittings are designed to make installation fast and easy. Simply push the tubing firmly into the fitting until seated. If removal is desired, push in evenly on release button and pull tubing out of fitting.