


4018 - Champ Fender Mender



Made In USA

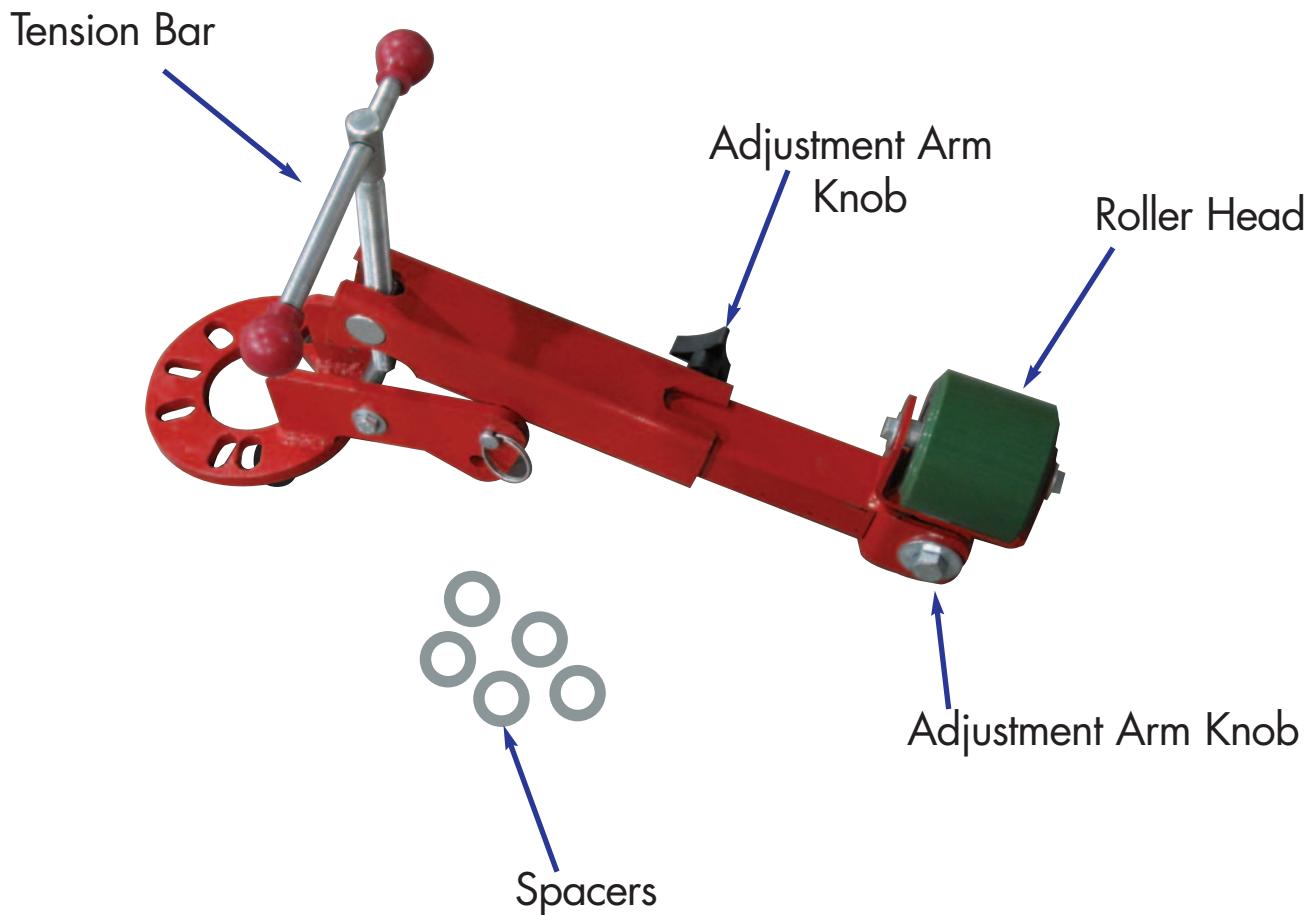

WARNING Read all assembly instructions completely before attempting to assemble unit. Improper or incomplete assembly could result in damage to tool or injury to user.

Auto Body Toolmart
Champ Frame Straightening Equipment, Inc.
2545 Millennium Dr. ~ Elgin, IL. 60124 (800) 382-1200
www.autobodytoolmart.com



1. Jack up vehicle and support with jack stands
2. Remove wheel from vehicle
3. Attach Fender Mender to hub over lug bolts
4. Install spacers and tighten lug nuts to hold Fender Mender to hub
5. Loosen adjustment arm knob and adjust arm to desired position.
6. Loosen adjustment bolt on roller head and adjust to desired angle.
7. Adjust tension bar to apply desired pressure on fender.
8. It is advised to warm the paint gently with a heat gun to prevent paint from cracking.
9. Roll Fender Mender to achieve desired fender expansion.
It may be necessary to readjust head angle & tension as needed to achieve desired results.